

INSTRUCTION MANUAL



WARNING! IMPROPER INSTALLATION, ADJUSTMENT OR ALTERATION CAN CAUSE PROPERTY DAMAGE, ANIMAL INJURY OR DEATH. READ THE INSTRUCTION MANUAL THOROUGHLY BEFORE INSTALLING THIS PRODUCT.



NOTE: DURING RACCOON BABY SEASON, CHECK FOR BABIES FIRST BEFORE INSTALLING THIS DEVICE. RACCOON BABIES WILL NOT EXIT THE DEN UNTIL FULLY MOBILE. IF BABIES ARE PRESENT, THEY NEED TO BE REMOVED PHYSICALLY BEFORE INSTALING THE EXCLUDER DOOR. PLACE THEM IN A BOX CLOSE TO THE ENTRY HOLE FOR MOTHER TO FIND AND RELOCATE TO A SECONDARY DEN. THIS PROCESS WILL TAKE SOME TIME. IF AFTER INSTALLING THE EXCLUDER DOOR, YOU REALIZE THERE ARE BABIES PRESENT, REMOVE THEM PHYSICALLY. IF THEY ARE NOT REACHABLE, REMOVE THE DOOR FOR THE MOTHER TO GET BACK IN. WAIT FEW WEEKS FOR BABIES TO BECOME MOBILE. RE-INSTAL THE DOOR AT THAT POINT & FOLLOW THE STEPS. NOTE THAT TRAPPING RACCOON BABIES COULD RESULT IN DEATH AND/OR PROPERTY DAMAGE.

NOTE: BABIES CAN BE ABANDONED, ATTACKED BY OTHER ANIMALS, AND/OR DIE FROM EXPOSURE TO COLD/HEAT WHEN MOVED OUT OF THEIR DEN.

STEP 1


INSPECTION

EXTERIOR

FIND THE MAIN AREA THAT RACCOON(S) ENTER THE STRUCTURE. THIS COULD BE THE JUNCTIONS, SOFFIT, ROOFLINE, ROOF VENTS PIPES OR ANY OTHER AREA.

INTERIOR


ALSO CHECK DEN FOR BABIES (DURING BABY SEASON: MAR-AUG) IF BABIES ARE PRESENT, READ THE ABOVE NOTICE.

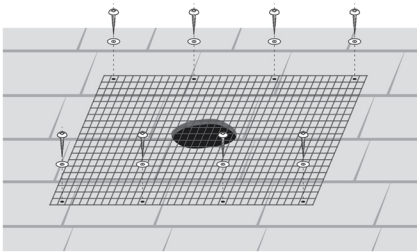

STEP 2

INSTALLATION


INSTAL THE EXCLUDER DOOR OVER THE MAIN ENTRY HOLE. IF THE HOLE IS SMALLER THAN THE DOOR PLEXI GLASS, USE 6 SCREWS TO FASTEN IN PLACE. IF THE HOLE IS LARGER THAN THE DOOR PLEXI GLASS, USE OTHER MATERIAL SUCH AS MESH OR PLAYWOOD TO COVER THE HOLE FIRST, THEN CUT A HOLE SIZE OF THE DOOR PLEXI GLASS AND INSTALL THE EXCLUDER OVER IT. MAKE SURE THE DOOR IS PLACED DIRECTLY OVER ENTRY HOLE . DO NOT PUT UNEVEN PRESSURE ON THE DOOR.

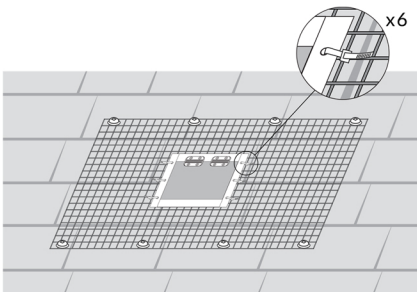

STEP 3

EVICION

WAIT 24 - 72 HRS FOR RACCOONS TO EXIT. ONCE NOISES AND/OR ACTIVITY STOPS DO A FINAL CHECK TO CONFIRM THERE AREN'T ANY NEW HOLES/DAMAGES. ONCE IT IS CONFIRMED, REMOVE THE EXCLUDER AND PREP THE AREA FOR REPAIR.

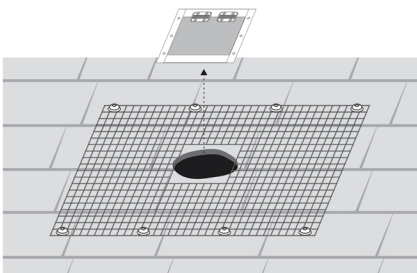

STEP 4

REPAIR

REPAIR THE DAMAGED AREA TO AVOID POTENTIAL WATER LEAKAGE. ONCE REPAIRED, SECURE THE AREA WITH SCREENING OR SIMILAR MATERIAL TO STOP RE-ENTRY.

NOTE: RACCOONS WILL COME BACK OCCASIONALLY TO PREVIOUS DEN SITES SO MAKE SURE TO SECURE THE AREA PROPERLY.

